MASTER COACHBUILDER

INFORMATION UPDATE

Date: December 15, 2014
Bulletin Number: XTS 39
Subject: Vehicle Labeling Clarifications

The current tire released for the XTS Professional Vehicle is the “Continental ContiPro Contact”, size “235/55R18 XL”. Please note there is no “P” prefix designator in the size identification number and there is an “XL” designation at the end.

Also on both the tire and final certification labels, the tire pressure needs to match the incomplete vehicle label as stated in KPA along with PSI.

Please see the W30 chassis samples below.

SAMPLE: CMC Tire Placard Label for W30 chassis

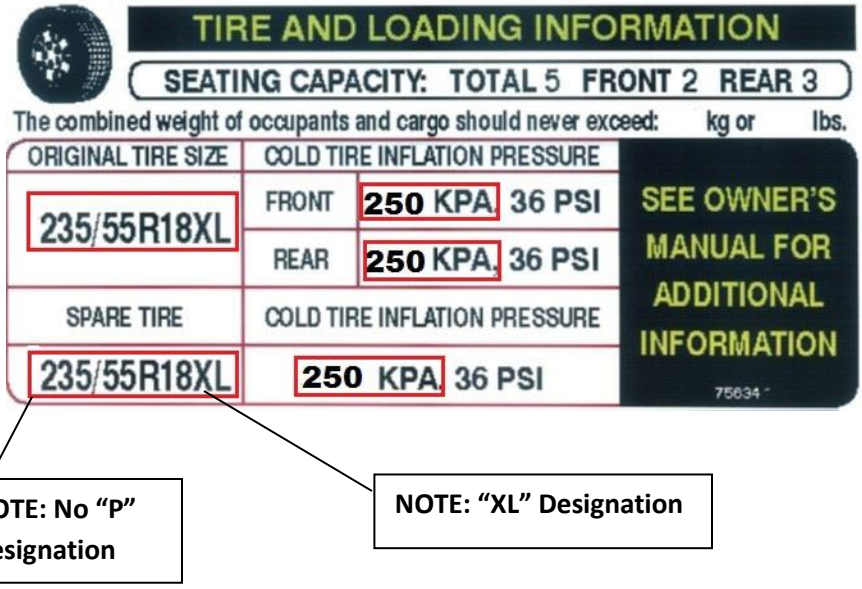

SAMPLE: CMC Final Certification Label

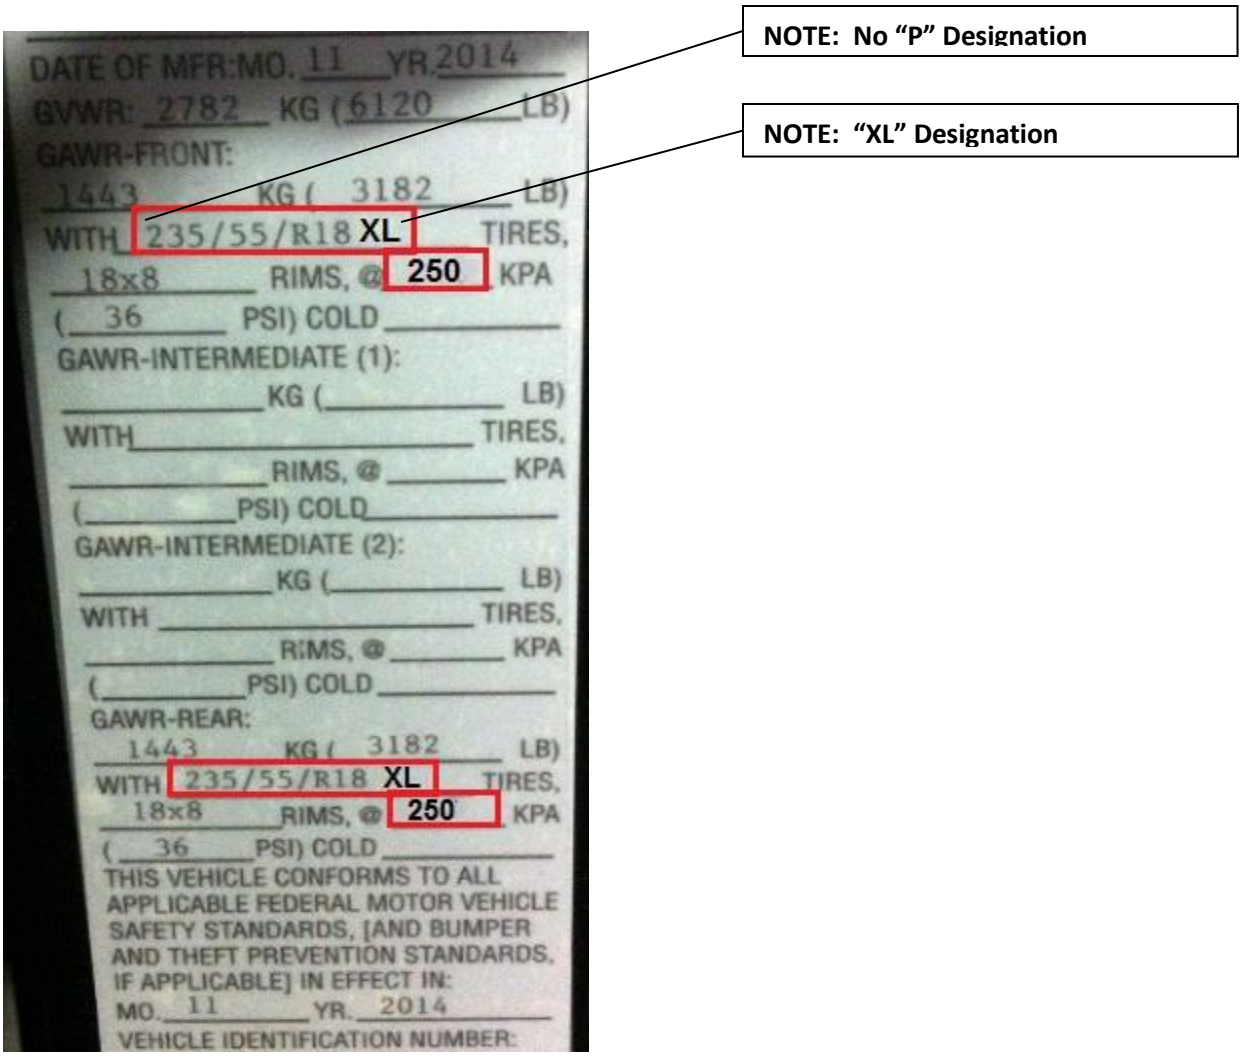
NOTE: No "P" Designation
NOTE: "XL" Designation
DATE OF MFR:MO. 11 YR. 2014
GVWR: 2782 KG (6120 LB)
GAWR-FRONT:
1443 KG (3182 LB)
WITH 235/55/R18 XL TIRES,
18x8 RIMS, @ 250 KPA
(36 PSI) COLD
GAWR-INTERMEDIATE (1):
KG (LB)
WITH TIRES,
RIMS, @ KPA
(PSI) COLD
GAWR-INTERMEDIATE (2):
KG (LB)
WITH TIRES,
RIMS, @ KPA
(PSI) COLD
GAWR-REAR:
1443 KG (3182 LB)
WITH 235/55/R18 XL TIRES,
18x8 RIMS, @ 250 KPA
(36 PSI) COLD
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS, [AND BUMPER AND THEFT PREVENTION STANDARDS, IF APPLICABLE] IN EFFECT IN:
MO. 11 YR. 2014
VEHICLE IDENTIFICATION NUMBER:

SAMPLE: W30 chassis IVD Label

GM
INCOMPLETE VEHICLE MANUFACTURED BY GENERAL MOTORS OF CANADA LTD.
12/14
GVWR 2789KG (6150LB)
GAWR FRT 1450KG (3198LB)
GAWR RR 1450KG (3198LB)
2GEXG6U31E9288276
MODEL: GB69
6AL TIRE SIZE SPEED RTG RIM COLD TIRE PRESSURE
FRT 235/55R18XL H 18X8.0J 250KPA(36PSI)
RR 235/55R18XL H 18X8.0J 250KPA(36PSI)
SPA 235/55R18XL H 18X8.0J 250KPA(36PSI)

Please contact Ray Bush with any questions.